


ATTENTION:

If the pulley is removed, torque the (9) 1/4-20 X 3/4 bolts to 120 in/lbs. (10 ft/lbs.) at re-assembly.

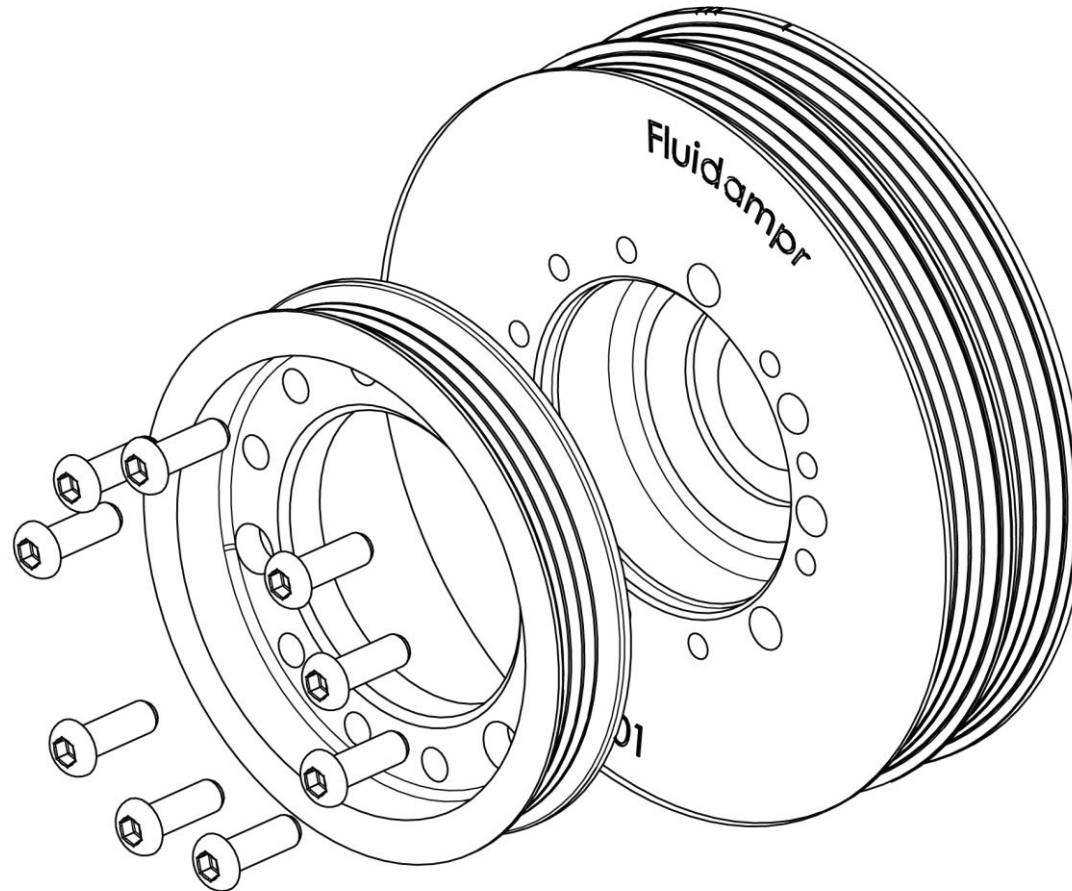

Please contact Fluidampr Customer Tech for any comments, suggestions or questions.

Phone: 716-592-1000

Web: www.fluidampr.com

E-mail: support@fluidampr.com

P/N 4NFB03, Revised 7/2019